



**STA Inc.**  
Spindle Technology Advance

# SP9 - 3033-A4 4033-A4 High-frequency spindle




This is highly resistant to corrosion due to the material being **STAINLESS STEEL.**

## Technical Specification

Speed	R. P. M	Max. 30,000 / 40,000
Max Frequency	Hz	Max. 1,000 / 1,334
Voltage	V	220 / 380
Output	kW	3.30
Torque	Nm	1.00
Current	A	16.0 / 13.1 / 7.6
Motor Poles	P	4
Collet / Tool Holder		HSK E25
Tool Change		Auto Tool Change
Tool Clamping Range	mm	1.0 ~ 10.0
Cooling System		Water / Oil
Bearing(Grease)	Pcs	4
Housing Diameter	φ	90
Weight	kg	11.0
Motor Protection		Thermistor (P.T.C)
Sealing		Air
Inner Taper Run-out	μm	<2
Lubrication		Grease

## Power, Torque, Speed Diagram

Speed (r p m )	15,000	20,000	25,000	30,000	40,000
Frequency (Hz)	500	667	833	1,000	1,334
Power (kW)	1.70	2.20	2.80	3.30	3.30
Torque (Nm)	1.00	1.00	1.00	1.00	0.80
Voltage (V) (220V)	110	147	183	220	220
Current (A) (220V)	13.1	13.4	13.1	13.1	12.7
Voltage (V) (380V)	190	253	317	380	380
Current (A) (380V)	7.6	7.6	7.6	7.5	7.4

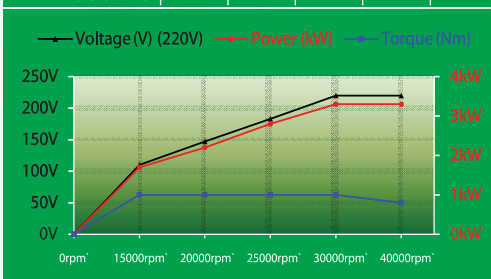

## Dimensions

